

Designed For Reliability..

WATER LEVEL

General

The HyQuest Solutions Tipping Bucket Flow Gauge is used for measuring water flow coming from a pipe or a drain. The unit comes with a dual reed switch, thus, when connected to a data logger, the data can be stored and collected when required. In addition, the flow gauge can be telemetered by connecting a compatible modem.

Features


- Non-Corrosive, Robust PVC & Stainless Steel Construction
- Dual Reed Switch
- Suitable for Pipe Flow Measurement and water drain measurement
- Bucket Tip Volumes factory calibrated at either 0.5 Litre up to 1.0 Litre
- Suitable for Harsh Environments

Specifications

- Material: PVC Plastic and Stainless Steel
- Reed Switch: Dual output reed switch potted in soft silicon rubber with varistor protection.
- Max Capacity: 24 VDC (0.5 amp max.)
- Resistance: Initial contact resistance 0.1 Ω

- M.T.B.F: 10⁸ to 10⁹ Operations
- Flow Rate: Maximum 25 litres/minute
- Dimensions: Length 390mm, Width 235mm, Height 345mm
- Accuracy:

Flow Rate	%Error
0.5 litre/min	-2%
1.0 litre/min	-6%
5.0 litre/min	-10%
10.0 litre/min	-14%
15.0 litre/min	-18%
20.0 litre/min	-20%
25.0 litre/min	-22%

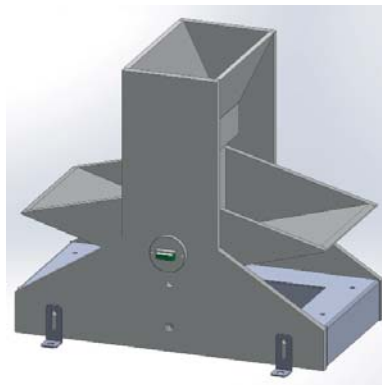

**Tipping Bucket Flow Gauge Model
TB1L or TB0.5L**



**Tipping Bucket Flow Gauge Model TB1L
or TB0.5L in field of use**

N.B. Specifications are subject to change at any time without notice.

Contact Us

General Enquiries (Australia)

Phone: +61 2 9601 2022

Email: sales@hyquestsolutions.com.au

Web: www.hyquestsolutions.com.au

General Enquiries (New Zealand)

Phone: +64 (0) 7 857 0810

Email: sales@hyquestsolutions.co.nz

Web: www.hyquestsolutions.co.nz

